




13" offset

Dorsal
Connection

ADJUSTABLE SRL LADDER ANCHOR SYSTEM


Redefining fall protection on fixed ladder systems – an adjustable captive eye allows connection to sternal or dorsal D-ring

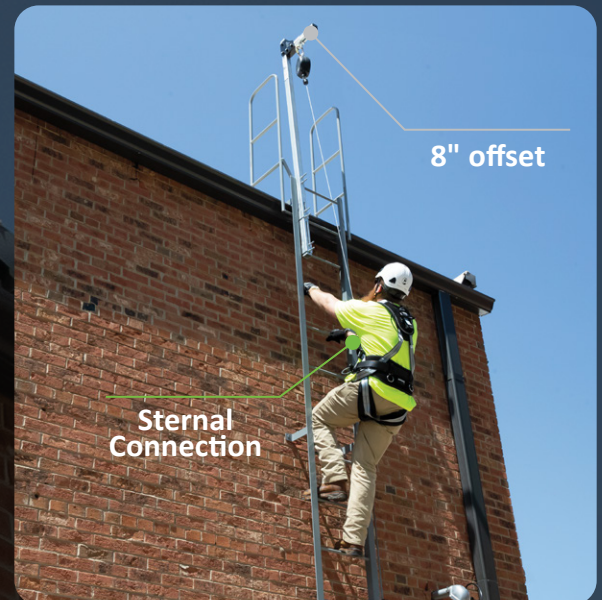

8" offset

Sternal
Connection

Adjustable Anchor Point
Offset range 8" to 13" to fit
your existing harness

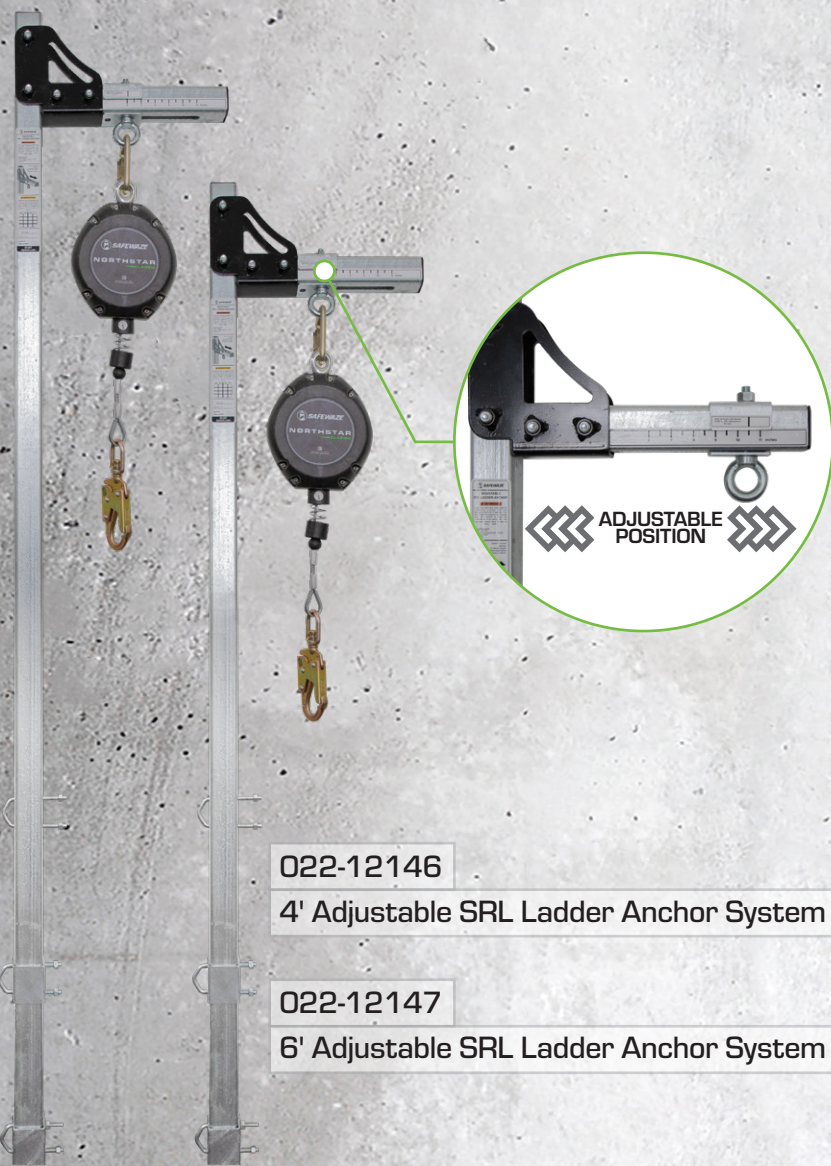

022-12146

4' Adjustable SRL Ladder Anchor System

022-12147

6' Adjustable SRL Ladder Anchor System

- » Includes all mounting hardware
- » SRL not included

Adjustable Captive Eye

Anchor point moves to offset from 8" to 13" – connects to sternal or dorsal D-ring on your existing harness

Extended Safety

Stay tied off while transitioning to your next anchor point or protected work zone

Versatile Ladder Solution

Installs on most fixed ladders while captive eye secures all SRL types

Durable Construction

Powder coated head unit and corrosion-resistant steel construction stand up to the elements for longer product life

KEY SPECS

Materials: Galvanized steel post and extension bracket, zinc plated steel captive eye and mounting hardware, powder coated stainless steel head unit

Minimum Breaking Strength: 3,600 lbs.

ANSI Weight Capacity: 130-310 lbs. (59-141 kg)

OSHA Weight Capacity: Up to 420 lbs. (191 kg)

OSHA Standards: 1926.502, 1910.140

	022-12153	Extended U-Bolt
	019-12029	Nuts (2pc set)
	022-12152	SRL Ladder Anchor Backer Bracket
	020-9012	14' SRL Tagline Rope (other lengths available)



225 Wilshire Avenue SW, Concord NC 28025 • 800-230-0319 • safewaze.com

