

KStrong® BRUTE-AL™ LE 50 ft. Aluminum Housing Cable SRL with swivel snap hook. Includes installation carabiner and tagline (ANSI).

Model: UFS480050L

50' Aluminum Housing Cable Leading Edge (LE) Rated SRL with swivel eye at anchorage end, other end load indicator swivel snap hook. Includes installation carabiner and tagline.



DESIGN

- Robust & durable Aluminum casing powder coated
- Has swivel anchorage eye at anchorage end
- Steel swivel snap hook at retractable end - gate strength 3600 lbs. (1633 kg)
- Galvanized steel wire rope
- Designed to be used where user needs to work near a potential leading edge

CABLE

Material: Galvanized steel wire rope Ø7/32"
Minimum Breaking Strength: 3400 lbs.

LENGTH

50 Feet

WEIGHT

16.36 lbs. ± 0.22 lbs. (7420 gm ±100 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 2


Class

2


Anchor above or
below dorsal D-ring



FRONT VIEW

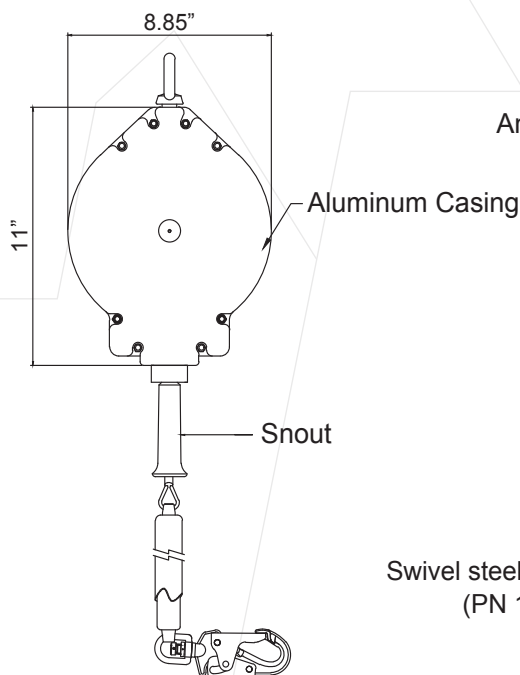

SIDE VIEW

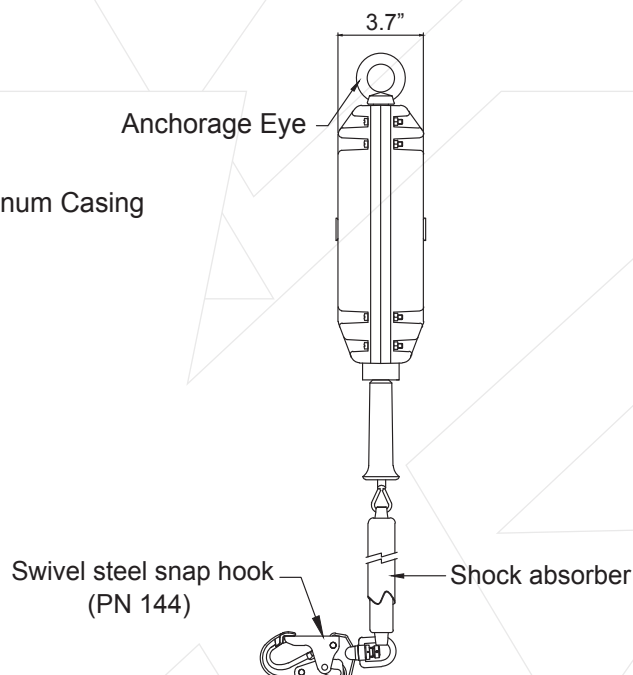

Batch #: _____ Serial #: _____
Date of First Use: _____